

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B32B 9/00	A1	(11) International Publication Number: WO 98/05494 (43) International Publication Date: 12 February 1998 (12.02.98)
(21) International Application Number: PCT/US97/13409 (22) International Filing Date: 30 July 1997 (30.07.97) (30) Priority Data: 60/023,071 2 August 1996 (02.08.96) US 08/902,145 29 July 1997 (29.07.97) US (71) Applicant: THE OHIO STATE UNIVERSITY RESEARCH FOUNDATION [US/US]; 1960 Kenny Road, Columbus, OH 43210-1063 (US). (72) Inventors: EPSTEIN, Arthur, J.; 55 South Merkle, Bexley, OH 43209 (US). WANG, Yunzhang; 500 Broadmeadows Boulevard #203, Columbus, OH 43214 (US). (74) Agent: GILCREST, Roger, A.; Standley & Gilcrest, Suite 210, 495 Metro Place South, Dublin, OH 43017-5315 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: LIGHT-EMITTING DEVICES CONTAINING NETWORK ELECTRODE POLYMERS IN ELECTRON BLOCKING LAYER		
(57) Abstract <p>In general terms, the present invention includes a light-emitting polymeric material, the polymeric material comprising: (a) an electron transporting polymer, the electron transporting polymer in contact with (b) an electron blocking polymer, the electron blocking polymer incorporating a network electrode polymer. Such devices may be bilayer or multilayer devices, in accordance with arrangements known in the art. Likewise, the source of electrical current may be from any appropriate source having the electrical characteristics sufficient to and appropriate for the desired device make-up and application.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

LIGHT-EMITTING DEVICES CONTAINING NETWORK ELECTRODE POLYMERS IN ELECTRON BLOCKING LAYER

This application claims the benefit of U.S. Provisional Application Serial No. 60/023,071 filed August 2, 1996.

Technical Field

The present invention is in the field of light-emitting polymers and light emitting devices produced therefrom.

Background

Since the report in 1990 of electroluminescence (EL) in poly(*p*-phenylene vinylene) (PPV) [1], EL of conjugated polymers has been considered an important property with many potential applications. Electroluminescence combined with other unique properties of polymers, such as solution processibility, band gap tunability, and mechanical flexibility, make conjugated polymers excellent candidates for low cost large area display applications. In addition to PPV, a variety of PPV derivatives and other conjugated polymers and copolymers have been found to exhibit electroluminescent properties [2,3]. Light-emitting devices incorporating these materials have demonstrated all the necessary colors needed for display applications.

Since the initial fabrication, a number of techniques have been developed to improve the device performance. One way is to use a low workfunction metal, such as Ca, as the electron injecting electrode (cathode) [4]. The double charge injection mechanism of polymer light-emitting diodes (LEDs) requires the match of cathode (anode) workfunction to the corresponding LUMO (HOMO) level of the polymer in order to achieve efficient charge injection. The relatively small electron affinity of most conjugated polymers requires metals with very low workfunctions to achieve efficient electron injection. However, since low

workfunction metals are generally oxygen reactive, devices with low workfunction cathode are usually unstable. Thus, polymers with high electron affinities are desirable.

Another common technique is to incorporate charge transporting layers in a multilayer device structure. The charge transporting layer enhances the transport of one type of charge while blocking the other, achieving balanced charge injection and transport and spatially confined emission zone away from the electrodes. To date the highest efficiency polymer light-emitting devices reported are multilayer devices [5].

Pyridine-based conjugated polymers have been shown to be promising candidates for light-emitting devices [6,7]. As compared to phenylene-based analogues, one of the most important features of the pyridine based polymers is the higher electron affinity. As a consequence, the polymer is more resistant to oxidation and shows better electron transport properties. In contrast, most other conjugated polymers are susceptible to oxidation and exhibit better hole transport properties. Figure 1 shows the structures of the pyridine-containing polymers and copolymers, namely poly(*p*-pyridine) (PPy), poly(*p*-pyridyl vinylene) (PPyV), and copolymers of PPyV and PPV (PPyVP(R)₂V) with various functional sidegroups R = C₁₂H₂₅, OC₁₆H₃₃, COOC₁₂H₂₅. With respect to π electronic levels, C₁₂H₂₅ is slightly electron donating; OC₁₆H₃₃ electron donating; and COOC₁₂H₂₅ electron withdrawing. The pyridine-based polymers are highly luminescent, especially the copolymers. The internal photoluminescent quantum efficiencies of the copolymers have been measured [8] to be 75-90% in solution and 18-30% in film, with the exception of the OC₁₆H₃₃ copolymer. The electron donating nature of OC₁₆H₃₃ makes this copolymer more susceptible for oxidation. As a result, the PL quantum efficiency of the OC₁₆H₃₃ copolymer is only 2% in film although it is high (~80%) in solution. To reduce the oxidation effects, the strapped copolymer (@PPyVPV)

was introduced, as shown in Figure 1 (d). Also the strapped copolymer shows fewer aggregation effects as compared to the "usual" copolymers (see Figure 1).

It is an object of the present invention to improve the performance of light-emitting polymers, such as reducing the required voltage required, and thus achieving similar levels of brightness while reducing the amount of power required for electroluminescence.

In view of the present disclosure or through practice of the present invention, other advantages may become apparent.

Summary of the Invention

In general terms, the present invention includes a light emitting polymeric material, the polymeric material comprising: (a) an electron transporting polymer; the electron transporting polymer in contact with (b) an electron blocking polymer, the electron blocking polymer incorporating a network electrode polymer. Such devices may be bilayer or multilayer devices, in accordance with arrangements known in the art. Likewise, the source of electrical current may be from any appropriate source having the electrical characteristics sufficient to and appropriate for the desired device make-up and application.

The electron transporting polymer may be any conductive polymeric material of appropriate conductive and electron affinity characteristics to allow it to act as the electron transporting polymer in a light emitting device. Examples of such polymers include pyridine-containing conjugated polymers and copolymers, and their derivatives. Likewise, the electron blocking polymer may be any polymeric material of appropriate electron-blocking characteristics to allow it to act as the electron blocking polymer in a light emitting device, such as those selected from the group consisting of poly(vinylcarbazoles) and their derivatives.

The network electrode polymer may be any polymeric material that forms an electrically conducting network polymeric structure within the electron blocking polymer. Examples include camphor sulfonic acid doped polyanilines. The network electrode polymers of the present invention may be produced through methods known in the art such as those
5 used in the synthesis of extended π -systems [17] and in the synthesis of ladder polymers [18].

The present invention also includes light emitting devices incorporating light emitting polymeric materials of the present invention. In general terms, such devices comprise: (a) an electron transporting polymer; the electron transporting polymer in contact with (b) an electron blocking polymer, the electron blocking polymer incorporating a network electrode
10 polymer; and (c) a source of electrical current so as to supply the electron transporting polymer with a flow of electrons, so as to cause an electroluminescent emission from the heterojunction between the electron transporting polymer and the electron blocking polymer.

In accordance with the present invention, there is disclosed light-emitting devices based on the pyridine-containing polymers and copolymers in various device configurations.

15 The high electron affinity of pyridine based polymers enables the use of relatively stable metals such as Al or even ITO as electron injecting contacts. Taking advantages of the better electron transport properties of the pyridine-containing polymers, we fabricate bilayer devices utilizing poly(9-vinyl carbazole) (PVK) as hole transporting/electron blocking polymer, which improves the device efficiency and brightness significantly due to the charge confinement and
20 exciplex emission at the PVK/emitting polymer interface. The incorporation of conducting polyaniline network electrode to PVK reduces the device turn on voltage significantly while maintaining the high efficiency. The control of the aggregation in the polymer films by blending with insulating host polymers open up the possibility of making voltage-controlled multi-color light-emitting devices. The capability of eliminating the use of low workfunction

metals makes the pyridine based polymers an excellent candidate for polymer light-emitting devices.

Brief Descriptions of the Drawings

Figure 1 shows the chemical structures of pyridine-based conjugated polymers and copolymers: (a) poly(p-pyridine) (PPy), (b) poly(p-pyridyl vinylene) (PPyV), (c) copolymers of PPyV and PPV derivatives (PPyVP(R)₂V) with various functional sidegroups R = C₁₂H₂₅, OC₁₆H₃₃, COOC₁₂H₂₅, and (d) strapped copolymer (@PPyVPV).

Figure 2 shows a schematic structure of a bilayer device with conducting polyaniline network electrode in accordance with one embodiment of the present invention.

Figure 3 shows a normalized optical absorption (dashed line) and PL of the strapped copolymer film (solid line), EL of a single layer device (solid line with dots), and PL of solution in xylenes (dotted line).

Figure 4 shows a comparison of (a) light-voltage and (b) light-current characteristics for a single layer device (square), a bilayer device (circle), and a bilayer device with PAN-CSA network (triangle). Inset: EL spectra for the single layer device (dashed line), the bilayer device (solid line), and the bilayer device with network electrode (dotted line).

Figure 5 shows a film PL of the pure wrapped copolymer and its blends with PMMA in various ratios with an excitation energy of 2.65 eV, and solution PL of the copolymer in xylenes. Inset: Film PL of a 1:20 blend with different excitation energies as indicated in the graph. Spectra are offset for clarity.

Figure 6 shows a schematic structure of an inverted light-emitting devices with PPy as emitting layer and PVK as hole transporting layer.

Detailed Description of the Preferred Embodiments

In accordance with the foregoing summary of the invention, the following presents a detailed description of the preferred embodiment of the invention which is presently considered to be its best mode.

5 The synthesis of the pyridine-containing polymers has been reported earlier [9-10]. For single layer devices, the emitting layer was spin-cast from solutions in formic acid (for PPy and PPyV) or xylenes (for copolymers) (with a concentration ~10 mg/ml) onto pre-cleaned patterned ITO substrates with sheet resistance of ~15 Ω /square at 1000-2000 rpm. For bilayer devices, PVK layer was spin coated onto ITO substrate from solution in tetrahydrofuran
10 (THF) (~10 mg/ml) at ~3000 rpm. The emitting layer was then spin coated on top of the PVK layer from appropriate solutions. The conducting polyaniline network electrode was formed by a spin-cast blend of camphor sulfonic acid doped polyaniline (PAN-CSA) and low molecular weight host polymer poly(methyl methacrylate) (PMMA) (from Aldrich Chemical Co.) in an appropriate ratio in *m*-cresol. The host polymer PMMA was subsequently washed
15 away by xylenes. The PVK and emitting layers were similarly coated as in the bilayer device. All solutions were filtered using Gelman Acrodisc CR PTFE 1 μ m filters. The top metal electrode was deposited by vacuum evaporation at a pressure below 10^{-6} torr. To prevent damage to the polymers, the substrate was mounted on a cold-water cooled surface during evaporation. Figure 2 shows schematically the structure of a bilayer device with PAN-CSA
20 network electrode.

Absorption spectra were measured on spin-cast films using a Perkin-Elmer Lambda 19 UV/VIS/NIR spectrometer. Photoluminescence (PL) and EL were measured using a PTI fluorometer (model QM-1). The current-voltage (I-V) characteristics were measured

simultaneously with EL using two Keithley 195A multimeters while dc voltage was applied by a HP 6218A DC power supply.

Figure 3 shows the optical absorption and PL of the strapped copolymer film and EL of a single layer device. For comparison, the PL of the strapped copolymer solution in xylenes is also shown. The film PL peaks at 2.05 eV with a shoulder at 2.25 eV. As compared to the film absorbance, the peak of the film PL is redshifted 0.55 eV, which is attributed to the aggregates formed in the film [12]. The shoulder is suggested to come from the unaggregated site, and is supported by the PL measurements of blends in PMMA (see below). It is noted that although the strapped and the corresponding unstrapped copolymer show similar features in solution PL, no shoulder is found in the film PL for the unstrapped copolymer, indicating that the strapped side chains partially break the aggregates formation in the film. The reversed oscillator strength of the EL as compared to PL suggesting that the EL come mainly from unaggregated sites, although there is also a significant contribution from the aggregate emission.

Figure 4 compares the light-voltage (L-V) and EL-current (EL-I) characteristics for a single layer device, a bilayer device, and a bilayer device with PAN-CSA network electrode using the strapped copolymer as emitting layer. As compared to those of the single layer device, the quantum efficiency and brightness of the bilayer device increase more than two orders of magnitude, reaching ~0.3% and ~300 cd/m² respectively. PVK is a well known hole transporting/electron blocking polymer. Besides the function of enhance the transport of holes injected from anode, it blocks the transport of electrons injected from cathode such that the electrons accumulate at the PVK/copolymer interface. This greatly enhance the probability of radiative recombination. In addition, the PVK layer separates the recombination zone from the

metal electrode so that the radiative recombination is protected against the well known non-radiative quenching at the metal/polymer interfaces.

One side effect of using the PVK layer is that it increases the device operating voltage substantially. One effective way to reduce the device turn on voltage is to use high surface
5 network electrode [13]. The concept behind the network electrode is that a rough electrode will create a non-uniform high electric field that enhances the charge injection. This technique has been successfully applied to PPV based devices [13]. By applying this technique to the PVK layer, the device operating voltage decreased significantly. For the devices shown here, the device operating voltage reduced from ~20 V to ~8 V (see Figure 4 (a)). Since the
10 incorporation of the PAN-CSA network electrode does not modify the PVK/copolymer interface, the high quantum efficiency and brightness of the bilayer device are maintained (see Figure 4 (b)). Thus, the incorporation of the network electrode to the bilayer device improves the power efficiency dramatically. The species that is responsible for the light generation in the bilayer device is attributed partially to exciplexes formed at the PVK/copolymer interface
15 and is identified by the PL measurements [14]. Figure 4 (b) inset compares the EL spectra of a single and a bilayer device using the strapped copolymer as emitting layer. As compare to that of the single layer device, the peak of the bilayer device, which comes from the exciplex emission at the PVK/copolymer interface, is blue-shifted ~0.15 eV. A shoulder in the bilayer EL at the peak of the single layer EL suggests that the strapped copolymer EL itself also
20 contribute to the bilayer EL.

The large difference between the film and solution PL of the pyridine-based polymers opens up an opportunity for fabricating voltage-controlled color-variable light-emitting devices. The aggregates formed in the polymer films result in significantly red-shifted luminescence as compared to isolated chains in solution. One expects to reduce the red-shift

of PL by breaking the aggregates formation. One effective way to break the aggregation is to blend the emissive polymer with an insulating host polymer, such as in PMMA. Figure 5 shows the PL spectra of the pure wrapped copolymer and its blends with PMMA in various ratios. For comparison, the PL spectrum of the wrapped copolymer in solution is also shown.

5 When the concentration of the emissive polymer decreases, the PL of the blends gradually blue shifted towards the solution PL, indicating partial break of the aggregation of polymer chains. Thus by choosing appropriate blend ratio, the emission color can be controlled. Furthermore, the PL spectra of the blends exhibit excitation energy dependence, as shown in Figure 5 inset for a blend with 1:20 (copolymer:PMMA) ratio excited at different energies. As
10 the excitation energy increases, the PL strength of the higher energy peak grows. In contrast, no excitation energy dependence is found in pure copolymer PL. The excitation energy dependence of the blend PL make it possible to fabricate voltage controlled multi-color light-emitting devices, and the work is in progress.

The high electron affinity of the pyridine-based polymers enables other novel device
15 configurations such as inverted light-emitting devices that are capable of eliminating the use of low workfunction metals. Poly(*p*-pyridine) (PPy) has an electron affinity of ~3.5 eV [16], which allows metals with relatively high workfunction as electron injecting contact. In the inverted light-emitting devices with PPy as emissive layer, ITO and Au are used as electron and hole injecting contacts, respectively. The inverted (-)ITO/PPy/Au(+) device show
20 improved device performance including quantum efficiency, brightness, operating stability and storage lifetimes as compared to the usual (+)ITO/PPy/Al(-) device. By inserting a PVK layer in between the PPy and Au, the device performance improves further Figure 6 shows schematically the device structure of the inverted light-emitting device with PVK.

Conclusion

In summary, pyridine containing conjugated polymers and copolymers are excellent candidates for polymer light-emitting devices. The high electron affinity of pyridine based polymers enables the use of relatively stable metals such as Al or even ITO as efficient electron injecting contacts. Taking advantages of the better electron transport properties of the pyridine-containing polymers, we fabricate bilayer devices utilizing PVK as hole transporting/electron blocking polymer. The bilayer device structure improves the device quantum efficiency and brightness significantly due to the charge confinement and the exciplex emission at the PVK/emitting polymer interface. The incorporation of the conducting polyaniline network electrode to PVK reduces the device turn on voltage significantly while maintaining the high efficiency and brightness of the bilayer device. The control of the aggregation in the polymer films by blending with insulating host polymers opens up the possibility of making voltage-controlled multi-color light-emitting devices.

The following references are hereby incorporated herein by reference:

References

- [1] J. H. Burroughes, D. D. C. Bradley, A. R. Brown, R. N. Marks, K. Mackay, R. H. Friend, P. L. Burns, and A. B. Holmes, *Nature* 347, 539 (1990).
- [2] D. D. C. Bradley, *Synth. Met.* 54, 401 (1993).
- [3] J. Kido, *Trends in Polymer Science* 2, 350 (1994).
- [4] D. Braun and A. J. Heeger, *Appl. Phys. Lett.* 58, 1982 (1991).
- [5] N. C. Greenham, S. C. Moratti, D. D. C. Bradley, R. H. Friend, and A. B. Holmes, *Nature* 365, 628 (1993).
- [6] D. D. Gebler, Y. Z. Wang, J. W. Blatchford, S. W. Jessen, L. B. Lin, T. L. Gustafson, H. L. Wang, T. M. Swager, A. G. MacDiarmid, and A. J. Epstein, *J. Appl. Phys.* 78, 4264 (1995).
- [7] Y. Z. Wang, D. D. Gebler, L. B. Lin, J. W. Blatchford, S. W. Jessen, H. L. Wang, and A. J. Epstein, *Appl. Phys. Lett.* 68, 894 (1996).
- [8] J. W. Blatchford, Ph.D thesis, The Ohio State University (1996).
- [9] T. Tamamoto, T. ITO, and K. Kubota, *Chem. Lett.*, 153 (1988).
- [10] M. J. Marsella, D. -K. Fu, and T. M. Swager, *Adv. Mater.* 7, 145 (1995).
- [11]
- [12] J. W. Blatchford, S. W. Jessen, L. -B. Lin, T. L. Gustafson, A. J. Epstein, D. -K. Fu, H. -L. Wang, T. M. Swager, and A. G. MacDiarmid, *Phys. Rev. B*, in press; J. W. Blatchford,

- T. L. Gustafson, A. J. Epstein, D. A. Vanden Bout, J. Kerimo, D. A. Higgins, P. F. Barbara, D. K. Fu, T. M. Swager, and A. G. MacDiarmid, *Phys. Rev. B*, in press.
- [13] Y. Yang, E. Westerweele, C. Zhang, P. Smith, and A. J. Heeger, *J. Appl. Phys.* 77, 694 (1995).
- 5 [14] D. D. Gebler, Y. Z. Wang, J. W. Blatchford, S. W. Jessen, T. L. Gustafson, D. -K. Fu, T. M. Swager, A. G. MacDiarmid, and A. J. Epstein, this proceedings.
- [15]
- [16] T. Miyamae, D. Yoshimura, H. Ishii, Y. Ouchi, K. Seki, T. Miyazaki, T. Koike, and T. Yamamoto, *J. Chem. Phys.* 103, 2738 (1995).
- 10 [17] U. Scherf, K. Müllen, Design and Synthesis of Extended π -Systems: Monomers, Oligomers, Polymers, *Synthesis*, pp. 23 - 38 (January/February 1992).
- [18] U. Scherf, K. Müllen, The Synthesis of Ladder Polymers, *Advances in Polymer Science*, Vol. 123, pp. 1 - 40, Springer-Verlag, Berlin (1995).
- 15 [19] U. Scherf, K. Müllen, Polyarenes and poly(arylenevinylenes), 7, A soluble ladder polymer via bridge of functionalized poly(*p*-phenylene)-precursors, *Makromol. Chem., Rapid Commun.*, Hüttig & Wepf Verlag, Basel, vol. 12, pp. 498-497 (1991).

The contents of U.S. Provisional Patent Application Serial Number 60/023,071 are hereby incorporated herein by reference.

20 In view of the present disclosure or through practice of the present invention, it will be within the ability of one of ordinary skill to make modifications to the present invention, such as through the use of equivalent arrangements and compositions, in order to practice the invention without departing from the spirit of the invention as reflected in the appended claims.

What is claimed is:

1. A light emitting polymeric material, said polymeric material comprising:
 - (a) an electron transporting polymer; said electron transporting polymer in contact with
 - (b) an electron blocking polymer, said electron blocking polymer incorporating a network electrode polymer.
2. A light emitting polymeric material according to claim 1, wherein said electron transporting polymer comprises a pyridine-containing conjugated polymers and copolymers.
3. A light emitting polymeric material according to claim 1, wherein said electron blocking polymer is selected from the group consisting of poly(vinylcarbazole).
4. A light emitting polymeric material according to claim 1, wherein said network electrode polymer comprises camphor sulfonic acid doped polyaniline.
5. A light emitting device, said device comprising:
 - (a) an electron transporting polymer; said electron transporting polymer in contact with
 - (b) an electron blocking polymer, said electron blocking polymer incorporating a network electrode polymer; and
 - (c) a source of electrical current so as to supply said electron transporting polymer with a flow of electrons, so as to cause an electroluminescent emission from said heterojunction between said electron transporting polymer and said electron blocking polymer.

6. A light emitting device according to claim 5, wherein said electron transporting polymer comprises a pyridine-containing conjugated polymers and copolymers.
7. A light emitting device according to claim 5, wherein said electron blocking polymer is selected from the group consisting of poly(vinylcarbazole).
8. A light emitting device according to claim 5, wherein said network electrode polymer comprises camphor sulfonic acid doped polyaniline.




Fig. 1A

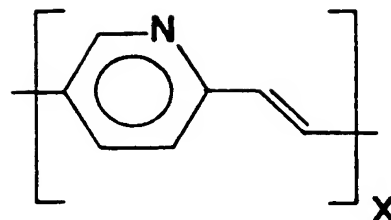


Fig. 1B

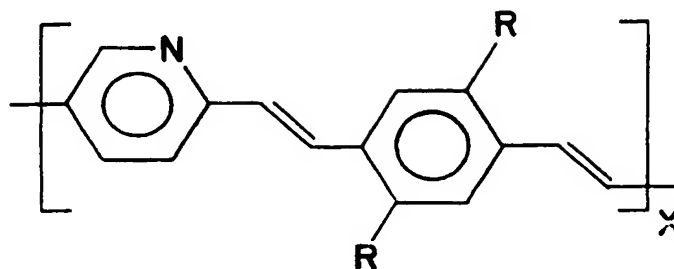


Fig. 1C


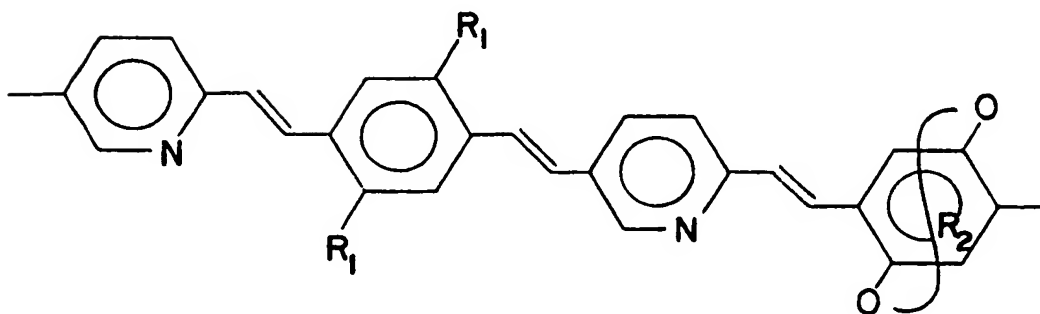


Fig. 1D

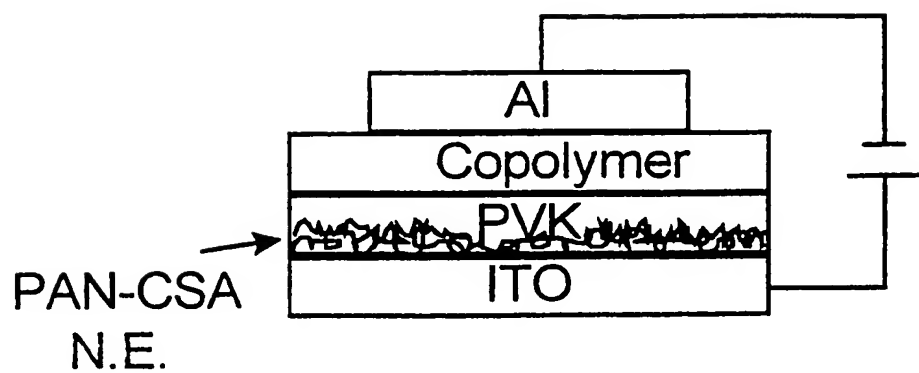


Figure 2

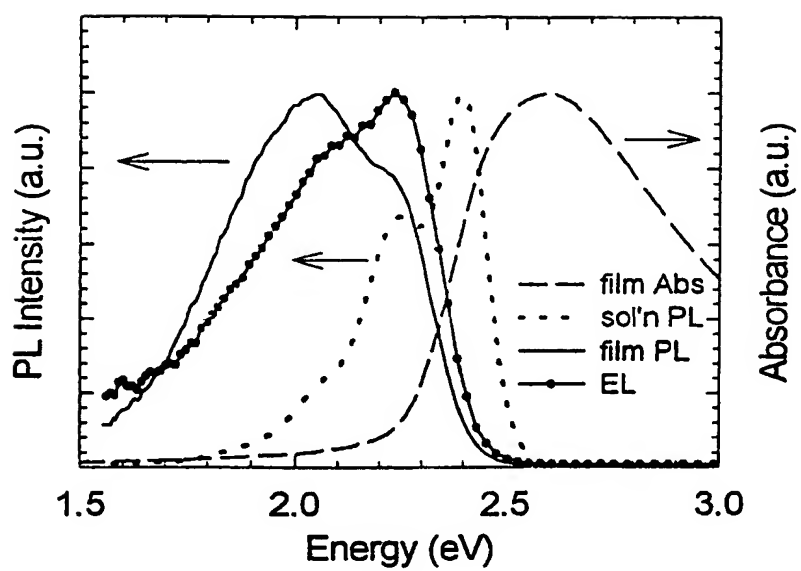
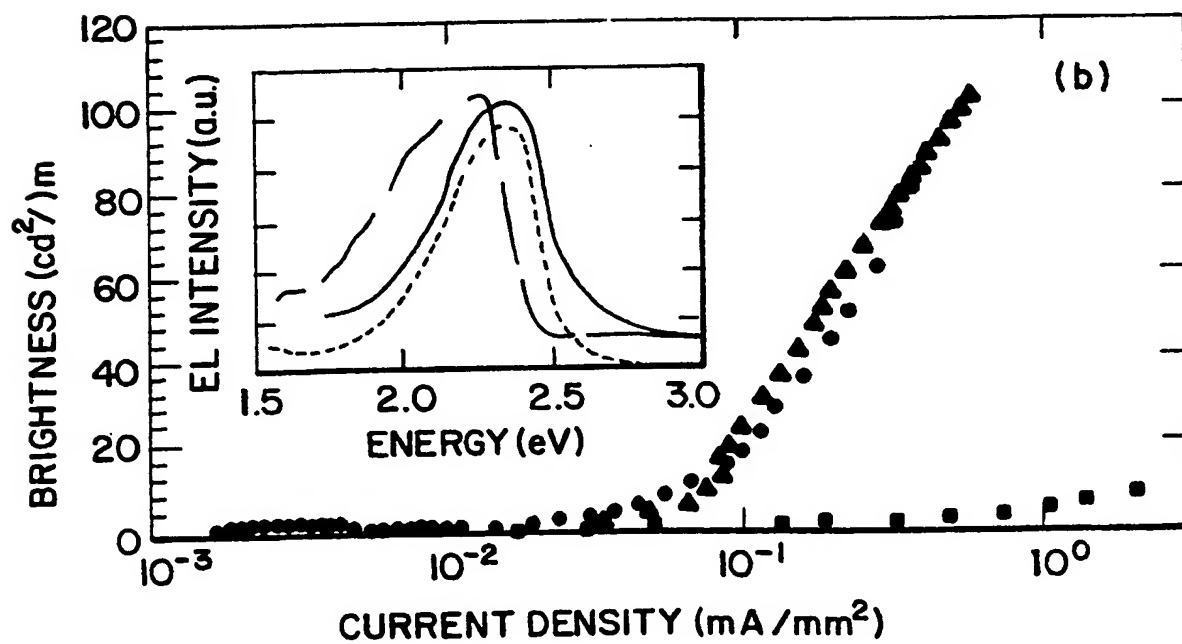
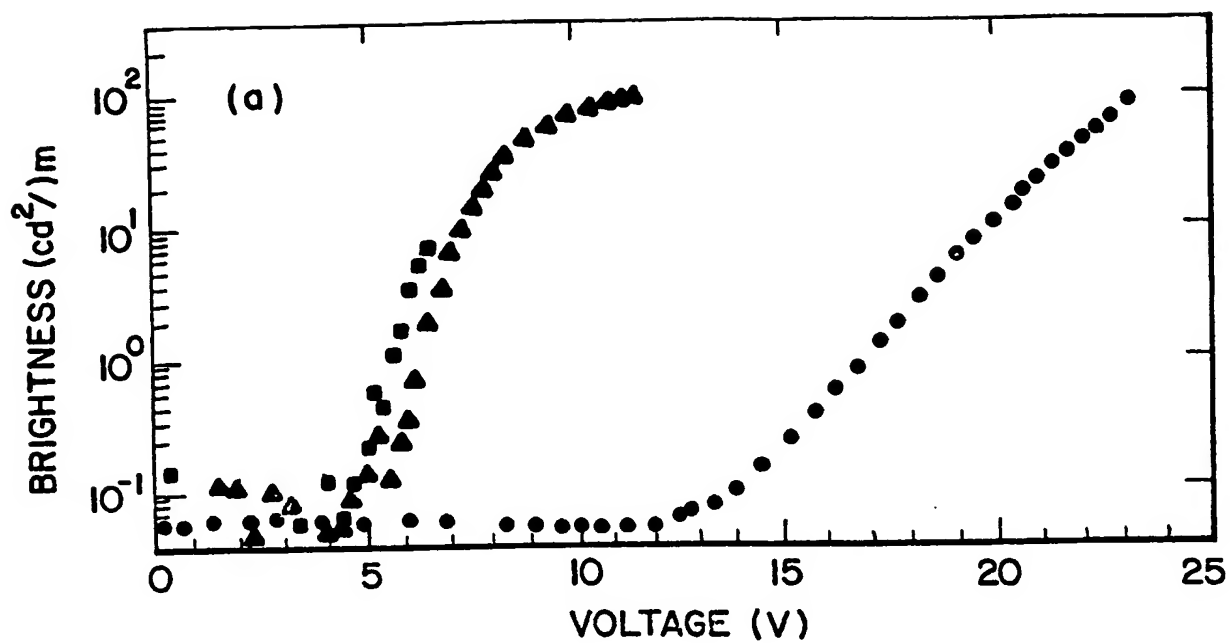


Figure 3

*Fig. 4*

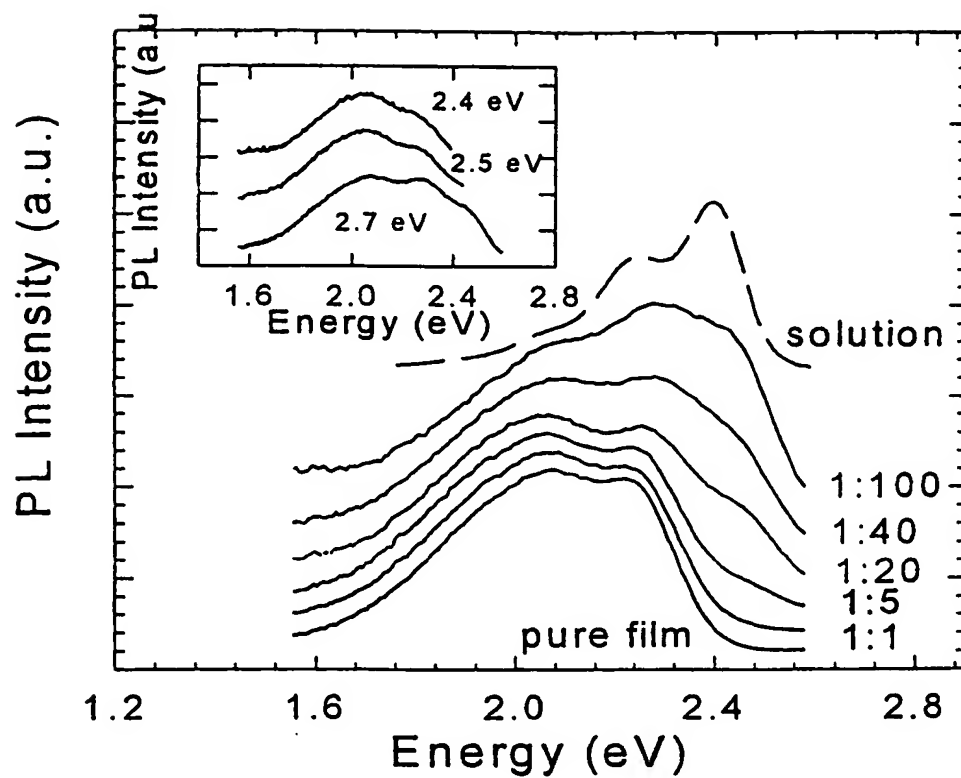


Figure 5

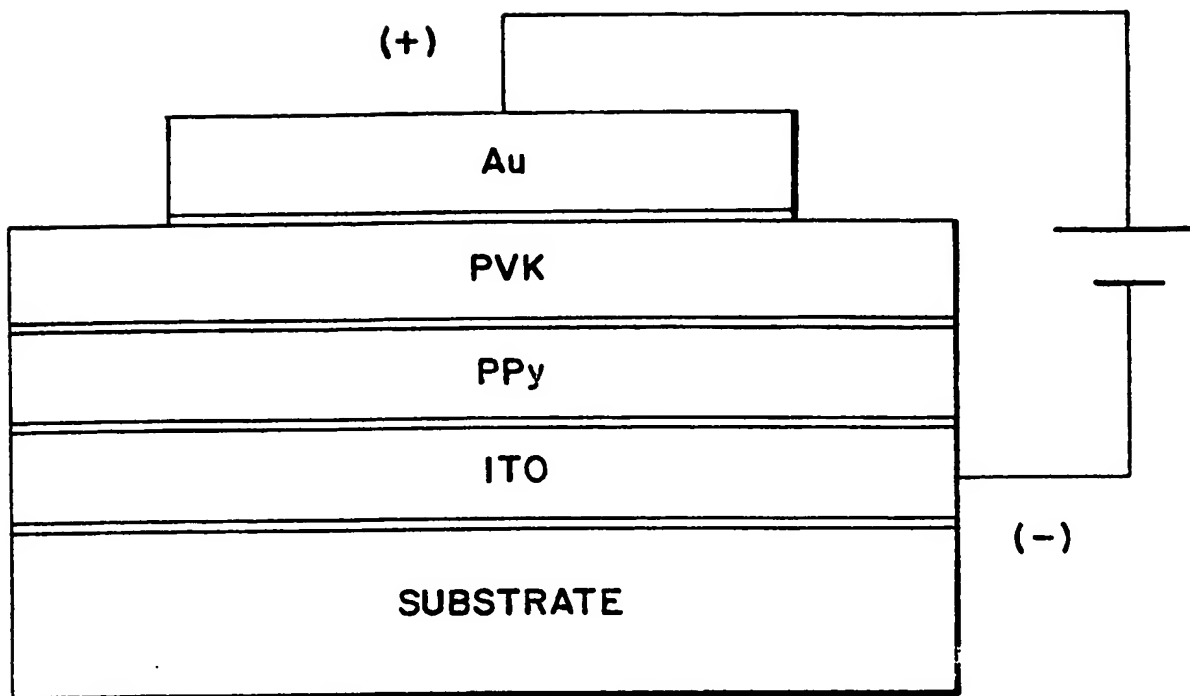


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/13409

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :B32B 9/00

US CL :428/209, 457, 917

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 428/209, 457, 917

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,486,406 A (SHI) 23 January 1996, see entire document.	1-8

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A*	document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means		
P document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

05 SEPTEMBER 1997

Date of mailing of the international search report

08 OCT 1997

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

TERREL MORRIS

Telephone No. (703) 308-2351